

DRYING CABINET

DC
RANGE

DC 4

4KG
9LB



FEATURES

- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space.
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room.
- All electrical components are placed on the top which makes it easy to maintain.
- Pull-out hanging system
- 3 temperatures; high, normal, low
- Energy efficient
- Overheat protection
- IP 24 classification
- CE approved


MARKETS

Day care center, Schools, Road workers dressing room, Ships, Airports, Ski resorts, Campings, Security

MAIN SPECIFICATIONS		DC4
Loading capacity	kg/lbs	4 kg/8,8 lbs
Drying capacity	g/min*	17
Hanging length	m/feet	16/52,5
Heating effect	kW	1,5
Total effect	kW	1,535
Energy consumption economy /kg	kWh	0,5
Energy consumption express /kg	kWh	0,6

*Valid for textile spun at high speed

TECHNICAL SPECIFICATIONS		DC4
ELECTRICAL CONNECTIONS		
Electrical connection		220-240/50/60Hz/1phase
Fuse	A	10
Total effect	kW	1,535
Heating elements	kW	1,5
AIR CONNECTIONS		
Outlet exhaust	Ø mm/inch	100/3,94
Outlet air flow	m ³ /h	45
Pressure drop	max Pa	60
Dewatering capacity	g/min	17*
SOUND LEVEL		
Airborne sound level	dB(A)	60
SHIPPING DATA		
Net	kg/lbs	61/134,5
Crate	kg/lbs	4/8,8
Shipping data net	kg/lbs	65/143
Shipping volume	m ³	0,2
DIMENSIONS		
Width	mm/inch	595/23,4
Depth	mm/inch	619/24,4
Height	mm/inch	1939/76,3

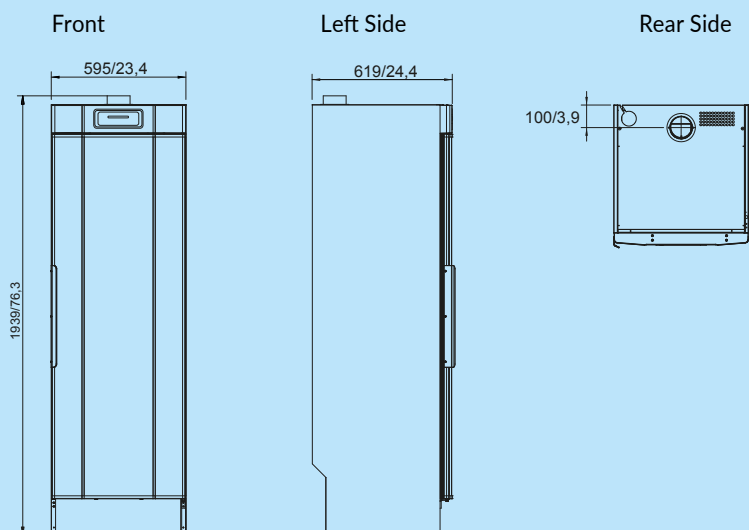

The Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com



12-2017

Primus by Alliance Laundry Systems